


FDM-SATA



NAND FLASH MODULE


- ▶ 4 to 32 GBytes NAND Flash capacity
- ▶ single level cell and multi level cell design
- ▶ high speed SATA 2 link
- ▶ commercial and industrial temperature

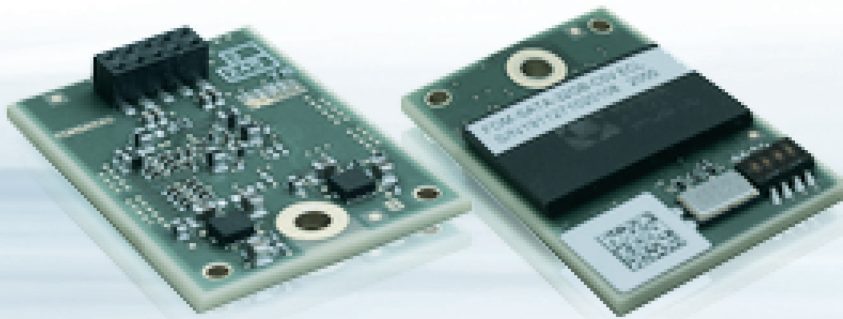

PRODUCT OVERVIEW

These NAND Flash modules are using Greenliant SATA NAND drive flash devices, allowing to store up to 32 Gbytes of data on a small onboard mezzanine form factor, compatible with Kontron Single Board Computer Cards. Single level Cells and Multi Level Cells are proposed in various capacities and operating temperature range. Please refer to ordering information. The power dissipation is limited to 1.5 Watts.

PIN 1	+5V
PIN 2	SATA_TX+
PIN 3	Not Connected
PIN 4	SATA_TX-
PIN 5	Not Connected
PIN 6	GND
PIN 7	GND
PIN 8	SATA_RX+
PIN 9	Not Connected
PIN 10	SATA_RX-

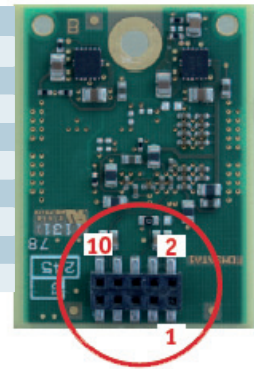

► MICROSWITCHES DESCRIPTION

1 SATA LINK SPEED	off: sata 1 or 2 (default) on: sata 1
2 WRITE PROTECT	off: no write protect (default) on: write protect
3 POWER DOWN NOTIFICATION (NOT AVAILABLE ON ALL MODELS)	off: no early powerdown notification (default) on: enable early power down notification
4 POWER DOWN NOTIFICATION (NOT AVAILABLE ON ALL MODELS)	Shall be set identically to switch 3.

In addition, switch 2 and 3/4 shall not be all on. The same pin is used on the NAND Flash device for both functions, write protect and early power down notification. The pin function is selected by software, the default is write protect / no write protect function when no software setting is performed to specify the pin function.



- When operating under Linux, it is strongly recommended to disable the file system journaling in order to avoid unnecessary wear of the device due to write cycles issued by the journaling of the filesystem. This will also help to limit unwanted erase/write cycle throughput which might lead a significant performance limitation. For example, to disable the journal on a ext4 filesystem, issue the following command:
tune2fs -O ^has_journal /dev/mapper/vg_lnx9-lv_root
Alternatively, to avoid any write access after deployment, an installation of a read-only root file system is recommended (like, for example, Fedora LiveUSB).

► ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
FDM-SATA	FDM-SATA-32GB-C0V	32 GBytes NAND Flash, MLC technology, 0° to +55° C operation, coated
FDM-SATA	FDM-SATA-8GB-I0V	8 GBytes NAND Flash, SLC technology, -40° to +85° C operation, coated
FDM-SATA	FDM-SATA-4GB-I0	4 GBytes NAND Flash, SLC technology, -40° to +85° C operation, non coated

► CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com

NORTH AMERICA

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: + 1 888 294 4558
Fax: + 1 858 677 0898
info@us.kontron.com

ASIA PACIFIC

1-2F, 10 Building, No. 8 Liangshuihe 2nd Street,
Economical & Technological Development Zone,
Beijing, 100176, P.R.China
Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn