



We IoT-ize your Business

Pi-Tron based on Raspberry Pi

– Solution for Industrial Products

As Raspberry Pi Design Partner we support you with our expertise in the development of new Raspberry Pi product designs.

- State of the art computing power
- Industrial-use interfaces, customizable
- WLAN/Bluetooth® connectivity
- Residential and industrial applications

BL Pi-Tron CM5

- Broadcom BCM2712 4x Arm® Cortex®-A76 @2.4 GHz
- 2 GB up to 16 GB LPDDR4-RAM
- Optional WLAN/Bluetooth
- Available until 2036

AL Pi-Tron CM5

- FRAM, 2x USB 2.0 Host, RS232, RS485, CAN, 4x DIO, WLAN/Bluetooth
- Stainless steel housing 111 x 25 x 76 mm for mounting on 35 mm mounting rail

BL Pi-Tron CM4

- 4x Arm® Cortex®-A72 @1.5 GHz
- 1 GB RAM up to 8 GB LPDDR4-RAM
- Optional WLAN/Bluetooth®
- Suitable for CODESYS® SoftPLC
- Available until 2034

AL Pi-Tron CM4

- 2x USB 2.0 Host, 2x LAN, RS232, RS485, CAN FD, 4x DIO
- Stainless steel housing 111 x 25 x 76 mm for mounting on 35 mm mounting rail

DL 7" Pi-Tron CM4

- Broadcom BCM2711, 4x Arm® Cortex®-A72 @1.5 GHz
- 3D Video Engine
- 7" IPS-Display, 1024 x 600 Pixel 450 cd/m²
- Aluminium Front, PCAP Multitouch

AL Pi-Tron CM3+

- 2x USB 2.0 Host, 2x LAN, RS232, RS485, CAN, 4x DIO
- Stainless steel housing 111 x 25 x 76 mm for mounting on 35 mm mounting rail

PiXtend®

– First choice for Industrial Projects

- PiXtend® controllers and PiXtend® eIO modules reduce your time-to-market
- Based on a single-board computer from the Raspberry Pi Foundation Pi4 or 3B+

PiXtend® V2-L- Pi 4 & PiXtend® V2-L-

- Brushed stainless steel DIN rail housing
- 16x DI, 12x DO, 6x AI, 2x AO, 4x Relais, 6x PWM, 4x GPIO
- Retain memory 64 Byte Flash EEPROM
- Suitable for CODESYS® SoftPLC

PiXtend® V2-S- Pi 4 & PiXtend® V2-S-

- Brushed stainless steel DIN rail housing
- 8x DI, 4x DO, 2x AI, 2x AO, 4x Relais, 4x PWM, 4x GPIO
- Retain memory 32 Byte Flash EEPROM
- Suitable for CODESYS® SoftPLC


- Programmable in common programming languages such as C or Python
- Suitable for CODESYS® SoftPLC

PiXtend® eIO Digital One Pro

- 8x 3.3 / 5 / 12 / 24 V, digital input including counter function
- 8x 0,5 A, 5 / 12 / 24 V, digital output
- Fast digital logic "HyperLogic"

PiXtend® eIO Analog One Pro

- 4x 0...5 V / 0...10 V, analog 10-Bit voltage inputs (AI-U)
- 4x 0...10 V, analog 12-Bit voltage outputs (AO-U)
- 2x 0...20 mA, analog 12-Bit current outputs (AO-I)
- 4x 0...20 mA, analog 10-Bit current inputs (AI-I)

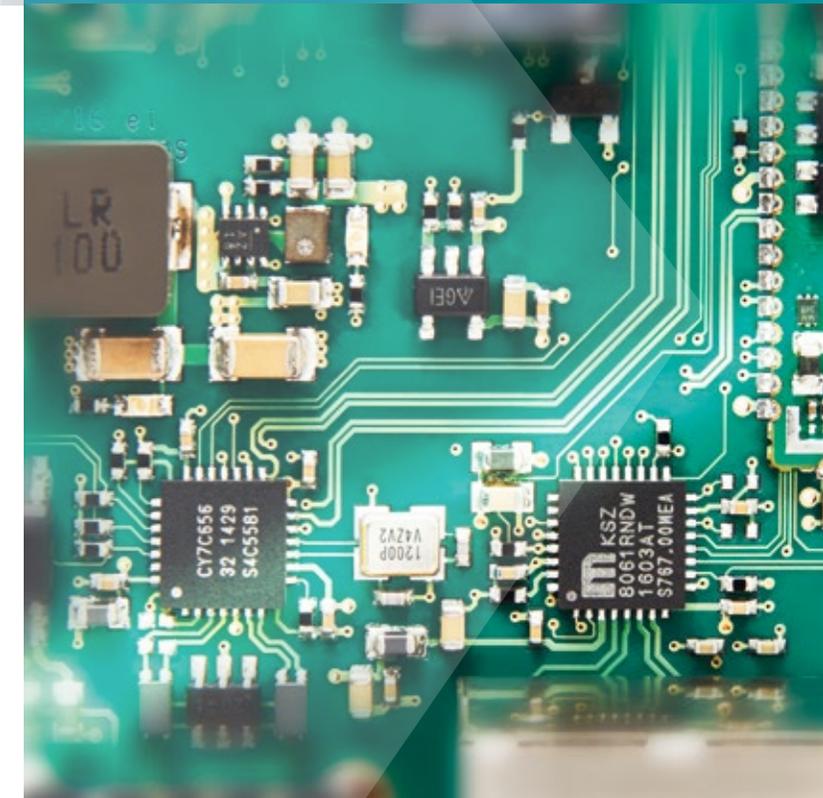

System-on-Module

– OSM-S Family



30 x 30 mm

- Directly soldered without plug connectors
- Fully automated assembly and test
- Manufacturer independent
- Future proof open standard



Automation-Line

– Proven & Robust



- CODESYS® ready
- Flexible interfaces
- Easy adaptation to customer-specific requirements
- Compact, fanless all-in-one solution

Secure & Connected



Electronics²

Development

– Your Ideas are our Motivation



From the idea to the development of a product ready for the market – our team is there to support you. Many years of development experience and know-how guarantee your success.



Hardware



Software



Mechanics



Product Industrialization

Production

– We are your Partner



Our expertise as an experienced electronics service provider goes far beyond production and assembly. We are a member of the Electronics² ODM/EMS Association.



Manufacturing Expertise



Rapid Prototyping



Test & Quality



Certification



Final Assembly



Services

OSM-S AM62L

- TI AM62L, 2x Arm® Cortex®-A53@1.25 GHz
- LPDDR4-RAM
- 2x 1 Gbit/s (1x with TSN)
- 2x CAN FD

OSM-S i.MX8M Plus

- 4x Arm® Cortex®-A53, M7, GPU and NPU
- 2x 1 Gbit/s (1x with TSN), 2x USB 3.0, 2x CAN FD
- MIPI DSI, LVDS, HDMI, 2x MIPI CSI
- CODESYS® SoftPLC support

OSM-S i.MX93

- 2x Arm® Cortex®-A55, M33, microNPU
- 2x 1 Gbit/s (1x with TSN), 2x USB 2.0 (Host or Device) 2x CAN FD
- MIDI DSI, LVDS, 1x MIPI CSI

OSM-S i.MX8M Mini

- 4x Arm® Cortex®-A53, M4, GPU
- 1x 1 Gbit/s
- MIPI DSI, 1x MIPI CSI
- CODESYS® SoftPLC support

CPU-Boards

– Efficient & Independent Platform

- Reduced development effort
- Fast time to market
- Scalable computing power
- Industrial connectors/ 24 V DC Input
- Wide range of applications

BL i.MX8M Plus

- 1 – 4 GB RAM, 4 – 128 GB eMMC, microSD-Card Slot
- 2x USB 2.0, 2x GBE, RS232, RS485, CAN, 4x DIO
- HDMI, LVDS, CSI, I²C/USB Touch
- Suitable for CODESYS® SoftPLC

BL i.MX93

- 1 – 2 GB RAM, 4 – 64 GB eMMC, NPU
- microSD-Card Slot
- 2x USB 2.0 Host, 1x USB 2.0 Typ-C UFP, 2x GBE, RS232, RS485, CAN FD, 4x DIO
- LVDS, MIPI CSI, I²C/USB Touch
- Suitable for CODESYS® SoftPLC

BL i.MX8M Mini

- 1 – 4 GB RAM, 8 – 64 GB eMMC, microSD-Card Slot
- 2x USB 2.0 Host, 1x Gbit/s, 1x 10/100 Mbit/s, RS232, RS485, CAN, 4x DIO
- HDMI, LVDS, I²C/USB Touch
- Suitable for CODESYS® SoftPLC

BL i.MX6 ULL

- 512 MB RAM, 512 MB NAND, 4 GB eMMC, microSD-Card Slot
- 2x USB 2.0 Host, 2x 10/100 Mbit/s, RS232, RS485, CAN, 2x DIO, 2x AIN
- RGB, I²C/USB Touch
- Suitable for CODESYS® SoftPLC

The SoM in combination with the Linux BSP and a complete development environment, offers an immediately deployable system which can be used for various applications. Develop your own baseboard based on the SoM module. Gladly we develop the baseboard together with you or take over the complete development process.

AL i.MX8M Mini & Plus & LTE


- 4x Arm® Cortex®-A53, Cortex®-M4 (Mini)
- 4x Arm® Cortex®-A53, Cortex®-M7, GPU, NPU (Plus)
- 4x Arm® Cortex®-A53, Cortex®-M4, GPU, LTE (LTE)
- 1 – 4 GB RAM, 8 – 64 GB eMMC, microSD-Card Slot
- Stainless steel housing 111 x 25 x 76 mm for mounting on 35 mm mounting rail

AL i.MX6 ULL

- i.MX6 ULL 1x Arm® Cortex®-A7 @800 MHz
- 512 MB RAM, 512 MB NAND, 4 GB eMMC, microSD-Card Slot
- 24 V Input
- Stainless steel housing 111 x 25 x 76 mm for mounting on 35 mm mounting rail

Display-Line

– Multitouch Panel

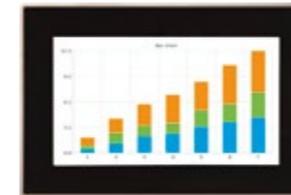

- High-quality visualization
- Scalable from low-power to high-performance
- Various customization options
- Long-term availability

DL 7" i.MX8M Mini

- 4x Arm® Cortex®-A53, Cortex®-M4
- 1 – 4 GB RAM, 8 – 64 GB eMMC, microSD-Card Slot
- 7" IPS-Display, 1024 x 600 Pixel, 450 cd/m²
- Aluminium Front, PCAP Multitouch

DL i.MX6 ULL

- i.MX6 ULL 1x Arm® Cortex®-A7 @800 MHz
- 512 MB RAM, 512 MB NAND, 4 GB eMMC, microSD-Card Slot
- Glass front, frameless IP65, 5" TFT-Display
- PCAP Multitouch

System-on-Module

– Powerful & Compact

- Short development cycle
- Reduced engineering risks
- EMC tested
- Long-term availability of CPU module



25 x 25 mm

SL i.MX6 ULL/UL

- i.MX6 ULL 1x Arm® Cortex®-A7 @800 MHz
- i.MX6 UltraLite 1x Arm® Cortex®-A7 @528 MHz
- 2x 10/100 Mbit/s, 1x PHY included, 2x CAN 2.0 B
- CODESYS® SoftPLC support

SL STM32 MP157

- 2x Arm® Cortex®-A7
- 1x Arm® Cortex®-M4 @200 MHz
- 1x 10/100 Mbit/s, 1x PHY included, 1x CAN FD
- MIPI DSI, RGB 24 Bit

