


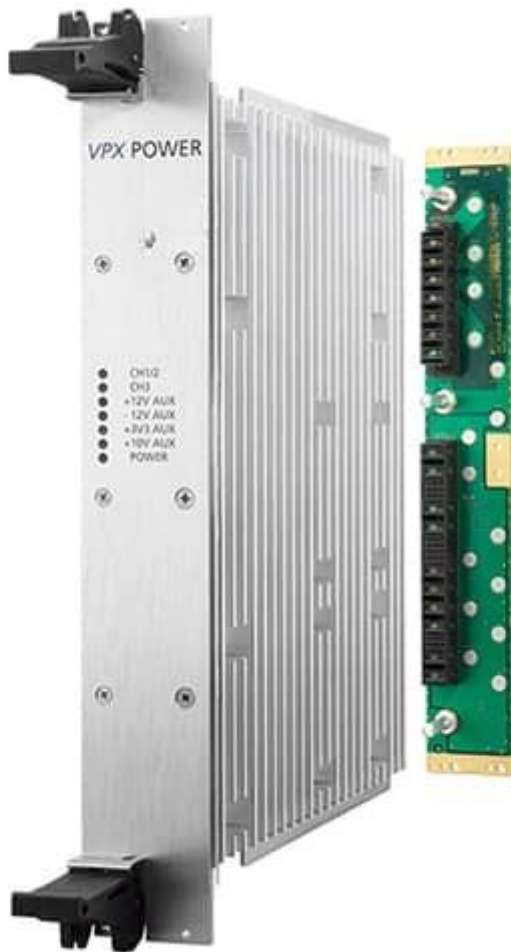

VPX 6U/AC Power Supply 1000W

- 1000W air cooled VPX power supply, VITA62 base line
- Input: 85-264 VAC, 5.2 – 7.3A / 37A (normal / peak inrush current)
- 6 DC Outputs: +12V [VS1]/35A, +12V [VS2]/35A, +5V [VS3]/30A, +3.3V_AUX/20A, +12V_AUX/2A, -12V_AUX/2A
- Efficiency up to 89%
- Forced air cooled, at least 800 LFM moving air
- Operating temperature -40°C ... 85°C (50% derated)

Electrical Specification

INPUT SPECIFICATION	
Input Voltage:	Typ. 90-264VAC
Power Factor:	Power Factor Typ. 0.975 at 230VAC
Input Connector:	Tyco 6450843-6
Input Frequency:	47-63Hz
Inrush Current:	10Arms at 230VAC; 37.2A (peak) at 230VAC
Input Current:	7.3A at 115VAC / 5.2A at 230VAC
Earth Leakage Current:	Typ. 1.1mA at 230VAC
No-Load Power:	Typ. 21Watt at 115VAC / 230VAC
OUTPUT SPECIFICATION	
Output Connector:	Tyco 6450843-6
Line Regulation:	Typ. 0.5%
Load Regulation:	V1/V2/V3 Typ. $\pm 1,5$; V4/V5 Typ. $\pm 5\%$
Total Regulation:	V1/V2/V3 Typ. ± 3 ; V4/V5 Typ. $\pm 5\%$
Noise & Ripple:	1.5% peak to peak
Remote Sense:	Available at V1/V2/V3
OVP:	Built-in at all outputs
Adjustability:	Available at V1/V2/V3
Current Sharing:	Active current sharing available at V1/V2/V3
PROTECTION	
Over Voltage (OVP):	Built-in at all outputs
Over Current Protection (OCP):	Built-in
Over Load Protection (OLP):	Typ. 110-150% max. load fully protected against output
Over Temperature (OTP):	Installed NTC and thermostat
Hold-up Time:	Typ. 6.2-7.3mS at 115VAC / 2.3-2.8mS at 230VAC
ENVIRONMENTAL	
Operating Temperature:	-40°C to +85°C with de-rating
Storage Temperature:	-45°C to +90°C
Cooling:	800LFM moving air
Humidity:	Operating: 5-90% (non-condensing) Storage: 0-95% (non-condensing)

SAFETY / EMC

Emissions (conducted):	EN55032 / FCC Class A
Harmonic Current:	IEC 61000-3-2
Safety Standard:	IEC 60950-1 Class I
CE Standard:	Meet Level 3 Criteria A
Vibration:	Six degree-of-freedom random, 10Hz-150Hz, 5G

Input & output connectors PIN assignment



P0			P1																			
P0-P7	P0-P4	P0-P1	P1	P2	D1	D2	P3	P4	P5	P6	D3	D4	D5	D6	P7	P8	D7	D8	D9	P9	P10	
L	N	G	COM	VO3 3.3V AUX.	PS_RNT	EN	COM	COM	VO2 P03 +5V	VO2 P03 +5V	N/A	A0	SDA	SYS RST	COM	COM	COM	DEG.	I/P_ok	VO1 P02 +12V	VO1 P01 +12V	
					C1	C2					C3	C4	CS	C6			C7	C8	C9			
					V3 +S	INH					N/A	A1	SCL	VO5 -12V			V2 V2	V2 CS	V2 -S			V2 +S
					B1	B2					B3	B4	B5	B6			B7	B8	B9			
					V3 -S	FAL					VO4 +12V	A2	SDA	N/A			N/A	N/A	N/A			
					A1	A2					A3	A4	A5	A6			A7	A8	A9			
					V3 CS	N/A				PSU_ RNT	Alert	SCL	N/A			V1 CS	V1 -S	V1 +S				

Output Voltage / Current Ratings Chart

Art. Nr.:	O/P Volt.	Volt.	Min.	Typ.	Max.	Peak.
D575.01000	VO1	+12V	0.5A	44A / 63A	70A	75A
	VO2	+5V	0.5A	21A / 30A	30A	30A
	VO3	+3,3V	1.0A	14A / 20A	20A	20A
	VO4	+12V	0.1A	1A / 1.5A	2A	2A
	VO5	-12V	0.1A	1A / 1.5A	2A	2A

Max. output power ≤703W at 90-180VAC; 1008W at 180-264VAC
For parallel application, a certain minimum current of outputs is required
Minimum load is strongly required when PSU do run

Derating chart

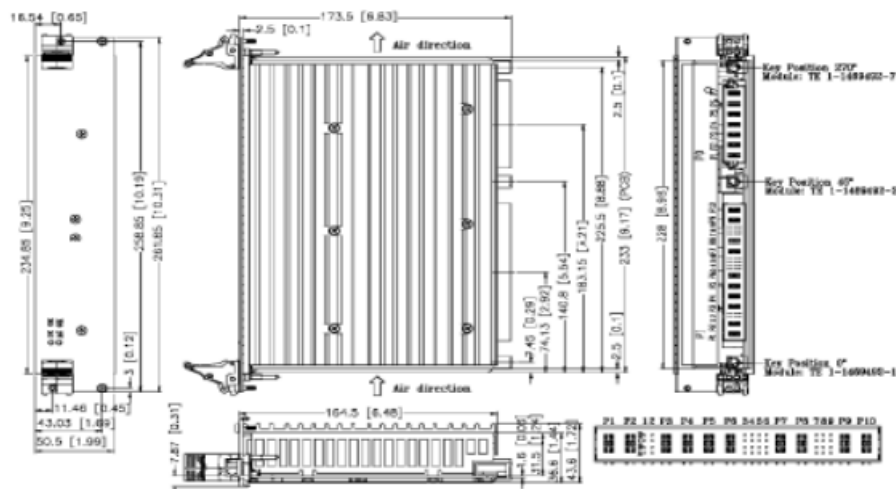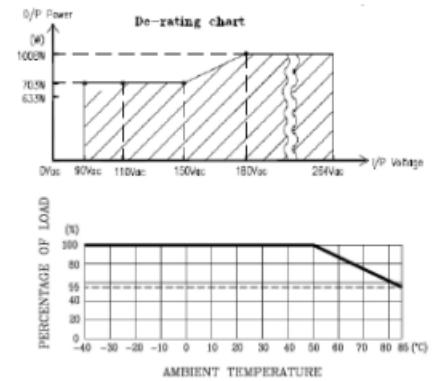

Mechanical dimensions: mm (inches) / Weight: 2,2 kg

Kontron Hartmann Wiener GmbH

Linde 18
51399 Burscheid
Tel.: +021746780
info.we@kontron.com
www.kontron.com/kontron-hartmann-wien