


» User Guide «

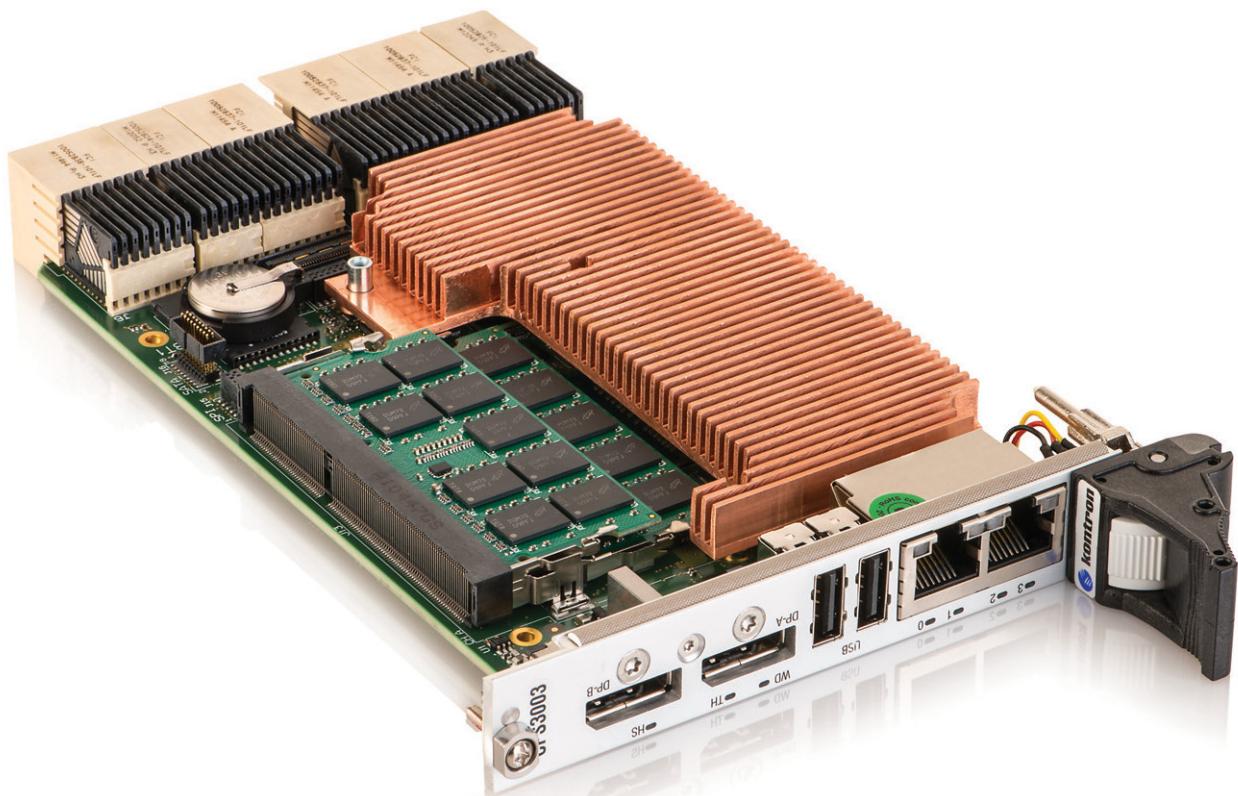

CPS3003-SA

Doc. ID: 1054-3213, Rev. 1.0

Date: May 13, 2013

Revision History

| Revision | Brief Description of Changes | Date of Issue |
|----------|------------------------------|---------------|
| 1.0 | Initial issue | 13-May-2013 |

Imprint

Kontron Europe GmbH may be contacted via the following:

MAILING ADDRESS

Kontron Europe GmbH
Sudetenstraße 7
D - 87600 Kaufbeuren Germany

TELEPHONE AND E-MAIL

+49 (0) 800-SALESKONTRON
sales@kontron.com

For further information concerning other Kontron products, please visit our Internet website:
www.kontron.com.

Disclaimer

Copyright © 2013 Kontron AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Kontron and the Kontron logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. Specifications are subject to change without notice.

Contents

| | |
|--|---|
| Revision History | 2 |
| Imprint | 2 |
| Disclaimer | 2 |
| Contents | 3 |
| Tables | 7 |
| Figures | 8 |
| Warranty | 9 |
| Proprietary Note | 9 |
| Trademarks | 9 |
| Environmental Protection Statement | 9 |

| | |
|--|---------------|
| 1 Introduction | 10 |
| 1.1 Board Overview | 10 |
| 1.2 System Expansion Capabilities | 11 |
| 1.2.1 CPS3003-EXTIO Extension Module (8 HP) | 11 |
| 1.2.2 CPS3003-BRIDGE Extension Module (9 HP)..... | 11 |
| 1.2.3 CPS-RI03-01 Rear Transition Module | 11 |
| 1.2.4 Smart Extension Module | 11 |
| 1.2.5 SATA Flash Module | 11 |
| 1.3 Board Diagrams..... | 11 |
| 1.3.1 Functional Block Diagram | 12 |
| 1.3.2 Front Panel | 13 |
| 1.3.3 Board Layout | 14 |
| 1.4 Technical Specification | 15 |
| 1.5 Standards | 18 |
| 1.6 Related Publications..... | 19 |
| 2 Functional Description | 20 |
| 2.1 Processor and Chipset..... | 20 |
| 2.1.1 Integrated Processor Graphics Controller | 20 |
| 2.2 Memory | 20 |
| 2.3 Watchdog Timer..... | 21 |
| 2.4 Battery..... | 21 |
| 2.5 Flash Memory..... | 21 |
| 2.5.1 SPI Boot Flash for uEFI BIOS..... | 21 |
| 2.5.2 SATA Flash Module | 21 |
| 2.6 Trusted Platform Module 1.2 | 22 |
| 2.7 Board Interfaces..... | 22 |
| 2.7.1 Front Panel LEDs..... | 22 |
| 2.7.1.1 System Status LEDs | 22 |

| | | |
|----------|--|-----------|
| 2.7.1.2 | General Purpose LEDs | 22 |
| 2.7.2 | USB Interfaces | 24 |
| 2.7.3 | DisplayPort Interfaces | 24 |
| 2.7.4 | Serial Ports | 24 |
| 2.7.5 | Gigabit Ethernet | 24 |
| 2.7.6 | SATA Interfaces | 25 |
| 2.7.7 | CompactPCI Serial Interface | 25 |
| 2.7.7.1 | CompactPCI Serial Connectors P1 to P5 | 26 |
| 2.7.7.2 | CompactPCI Serial Connector P6 | 28 |
| 3 | Configuration | 30 |
| 3.1 | DIP Switch Configuration | 30 |
| 3.2 | System Write Protection | 30 |
| 3.3 | CPS3003-SA-Specific Registers | 31 |
| 3.3.1 | Write Protection Register (WPROT) | 31 |
| 3.3.2 | Reset Status Register (RSTAT) | 32 |
| 3.3.3 | Watchdog Timer Control Register (WTIM) | 33 |
| 3.3.4 | LED Configuration Register (LCFG) | 34 |
| 3.3.5 | LED Control Register (LCTRL) | 34 |
| 3.3.6 | General Purpose Output Register (GPOUT) | 35 |
| 3.3.7 | General Purpose Input Register (GPIN) | 35 |
| 4 | Power Considerations | 36 |
| 5 | Thermal Considerations | 38 |
| 5.1 | Operational Limits for the CPS3003-SA | 39 |
| 5.2 | Airflow Impedance | 40 |
| 6 | CPS3003-EXTIO Extension Module | 41 |
| 6.1 | Overview | 41 |
| 6.2 | Technical Specifications | 41 |
| 6.3 | CPS3003-EXTIO Module Functional Block Diagram | 42 |
| 6.4 | Front Panel of the CPS3003-SA with CPS3003-EXTIO Module | 43 |
| 6.5 | CPS3003-EXTIO Module Board Layout | 43 |
| 6.6 | Module Interfaces (Front Panel and Onboard) | 44 |
| 6.6.1 | USB Interface | 44 |
| 6.6.2 | Serial Port | 44 |
| 6.6.3 | CFast Card Socket | 44 |
| 7 | CPS3003-BRIDGE Extension Module | 45 |
| 7.1 | Overview | 45 |
| 7.2 | Technical Specifications | 45 |
| 7.3 | CPS3003-BRIDGE Module Functional Block Diagram | 46 |
| 7.4 | Front Panel of the CPS3003-SA with CPS3003-BRIDGE Module | 47 |
| 7.5 | CPS3003-BRIDGE Module Board Layout | 47 |

| | | |
|-----------|---|-----------|
| 7.6 | Module Interfaces (Front Panel and Onboard)..... | 48 |
| 7.6.1 | USB Interface | 48 |
| 7.6.2 | Serial Port..... | 48 |
| 7.6.3 | CFast Card Socket..... | 48 |
| 7.6.4 | CompactPCI Interfaces | 48 |
| 7.6.5 | CompactPCI Connector Keying | 48 |
| 8 | CPS-RI03-01 Rear Transition Module | 49 |
| 8.1 | Overview..... | 49 |
| 8.2 | Technical Specifications | 49 |
| 8.3 | CPS-RI03-01 Module Functional Block Diagram | 50 |
| 8.4 | CPS-RI03-01 Rear Transition Module Layout..... | 51 |
| 8.5 | Module Interfaces | 52 |
| 8.5.1 | USB Interfaces | 52 |
| 8.5.2 | DisplayPort Interface | 52 |
| 8.5.3 | Gigabit Ethernet Interface | 52 |
| 8.5.4 | COM Interface | 52 |
| 8.5.5 | Rear I/O Interface on CompactPCI Serial Connector rP6 | 52 |
| 8.5.6 | System Write Protection | 52 |
| 9 | Smart Extension Module | 53 |
| 9.1 | Overview..... | 53 |
| 9.2 | Technical Specifications | 53 |
| 9.3 | Smart Extension Module Layout | 53 |
| 9.4 | Module Interfaces | 53 |
| 9.4.1 | USB Interface | 53 |
| 9.4.2 | SATA Interface | 53 |
| 10 | SATA Flash Module..... | 54 |
| 10.1 | Overview..... | 54 |
| 10.2 | Technical Specifications | 54 |
| 10.3 | SATA Flash Module Layout..... | 54 |
| 11 | Installation | 55 |
| 11.1 | Safety | 55 |
| 11.2 | General Instructions on Usage | 55 |
| 11.3 | Board Installation | 56 |
| 11.3.1 | Hot Swap Insertion..... | 56 |
| 11.3.2 | Hot Swap Removal | 56 |
| 11.4 | CFast Card Installation | 57 |
| 11.5 | Rear Transition Module Installation | 57 |
| 11.6 | Battery Replacement | 57 |
| 12 | uEFI BIOS | 58 |
| 12.1 | Starting the uEFI BIOS | 58 |

| | | |
|----------|---|----|
| 12.2 | Setup Menus | 59 |
| 12.2.1 | Main Menu | 59 |
| 12.2.2 | Boot Menu | 61 |
| 12.2.3 | Security Menu | 62 |
| 12.2.3.1 | Modes of Security | 62 |
| 12.2.3.2 | Remember the Password | 63 |
| 12.2.4 | Save and Exit Menu | 63 |
| 12.3 | The uEFI Shell | 64 |
| 12.3.1 | Introduction, Basic Operation | 64 |
| 12.3.1.1 | Entering the uEFI Shell | 64 |
| 12.3.1.2 | Exiting the uEFI Shell | 64 |
| 12.3.2 | Kontron-Specific uEFI Shell Commands | 65 |
| 12.4 | uEFI Shell Scripting | 66 |
| 12.4.1 | Startup Scripting | 66 |
| 12.4.2 | Create a Startup Script | 66 |
| 12.4.3 | Examples of Startup Scripts | 67 |
| 12.4.3.1 | Automatic Booting from USB Flash Drive | 67 |
| 12.4.3.2 | Execute Shell Script on Other Harddrive | 67 |
| 12.4.3.3 | Enable Watchdog and Control PXE Boot | 67 |
| 12.4.3.4 | Handling the Startup Script in the SPI Boot Flash | 68 |
| 12.5 | Updating the uEFI BIOS | 69 |
| 12.5.1 | uEFI BIOS Fail-Over Mechanism | 69 |
| 12.5.2 | Updating Procedure | 69 |
| 12.5.3 | uEFI BIOS Recovery | 69 |
| 12.5.4 | Determining the Active Flash | 69 |

Tables

| | | |
|----|---|----|
| 1 | CPS3003-SA Main Specifications | 15 |
| 2 | Standards | 18 |
| 3 | Additional Standards for Boards Ordered with Ruggedized Service | 19 |
| 4 | Related Publications | 19 |
| 5 | Features of the Processors Supported on the CPS3003-SA | 20 |
| 6 | System Status LEDs Function | 22 |
| 7 | General Purpose LEDs Function | 23 |
| 8 | POST Code Sequence | 23 |
| 9 | POST Code Example | 23 |
| 10 | Legend for CompactPCI Serial Connectors P1 to P5 | 26 |
| 11 | Pinout for CompactPCI Serial Connector P1 | 27 |
| 12 | Pinout for CompactPCI Serial Connector P2 | 27 |
| 13 | Pinout for CompactPCI Serial Connector P3 | 27 |
| 14 | Pinout for CompactPCI Serial Connector P4 | 28 |
| 15 | Pinout for CompactPCI Serial Connector P5 | 28 |
| 16 | Legend for CompactPCI Serial Connector P6 | 28 |
| 17 | Pinout for CompactPCI Serial Connector P6 | 29 |
| 18 | DIP Switch SW1 Functionality | 30 |
| 19 | CPS3003-SA-Specific Registers | 31 |
| 20 | Write Protection Register (WPROT) | 31 |
| 21 | Reset Status Register (RSTAT) | 32 |
| 22 | Watchdog Timer Control Register (WTIM) | 33 |
| 23 | LED Configuration Register (LCFG) | 34 |
| 24 | LED Control Register (LCTRL) | 34 |
| 25 | General Purpose Output Register (GPOUT) | 35 |
| 26 | General Purpose Input Register (GPIN) | 35 |
| 27 | DC Operational Input Voltage Range | 36 |
| 28 | CPS3003-SA Power Consumption | 37 |
| 29 | Power Consumption of CPS3003-SA Accessories | 37 |
| 30 | CPS3003-EXTIO Module Specifications | 41 |
| 31 | Serial Port Connector J3 Pinout | 44 |
| 32 | CPS3003-BRIDGE Module Specifications | 45 |
| 33 | Serial Port Connector J3 Pinout | 48 |
| 34 | CPS-RIO3-01 Rear Transition Module Specifications | 49 |
| 35 | Serial Port Connectors J7 (COMB) and J8 (COMA) Pinout | 52 |
| 36 | Smart Extension Module Specifications | 53 |
| 37 | SATA Flash Module Specifications | 54 |
| 38 | Navigation | 58 |
| 39 | Main Menu Sub-Screens and Functions | 59 |
| 40 | Boot Menu Functions | 61 |
| 41 | Security Menu Functions | 62 |
| 42 | Modes of Security | 62 |
| 43 | Save and Exit Menu Functions | 63 |
| 44 | Kontron-Specific uEFI Shell Commands | 65 |

Figures

| | | |
|----|---|----|
| 1 | CPS3003-SA Functional Block Diagram | 12 |
| 2 | 4 HP CPS3003-SA Front Panel | 13 |
| 3 | 4 HP CPS3003-SA Board Layout (Top View) | 14 |
| 4 | 4 HP CPS3003-SA Board Layout (Bottom View) | 14 |
| 5 | CompactPCI Serial Connectors P1 to P6 | 25 |
| 6 | DIP Switch SW1 | 30 |
| 7 | CPS3003-SA with i7-3612QE (SV), 2.1 GHz | 39 |
| 8 | CPS3003-SA with i7-3555LE (LV), 2.5 GHz | 39 |
| 9 | CPS3003-SA with i7-3517UE (ULV), 1.7 GHz | 40 |
| 10 | CPS3003-SA Airflow Impedance | 40 |
| 11 | CPS3003-EXTIO Module Functional Block Diagram | 42 |
| 12 | Front Panel of the 8 HP CPS3003-SA with CPS3003-EXTIO Module | 43 |
| 13 | CPS3003-EXTIO Module Board Layout (Top View) | 43 |
| 14 | Serial Port Connector J3 | 44 |
| 15 | CPS3003-BRIDGE Module Functional Block Diagram | 46 |
| 16 | Front Panel of the 9 HP CPS3003-SA with CPS3003-BRIDGE Module | 47 |
| 17 | CPS3003-EXTIO Module Board Layout (Top View) | 47 |
| 18 | Serial Port Connector J3 | 48 |
| 19 | CPS-RIO3-01 Module Functional Block Diagram | 50 |
| 20 | CPS-RIO3-01 Rear Transition Module Layout | 51 |
| 21 | Smart Extension Module Layout (Top View) | 53 |
| 22 | SATA Flash Module Layout (Top and Bottom Views) | 54 |

Warranty

This Kontron product is warranted against defects in material and workmanship for the warranty period from the date of shipment. During the warranty period, Kontron will at its discretion decide to repair or replace defective products.

Within the warranty period, the repair of products is free of charge as long as warranty conditions are observed.

The warranty does not apply to defects resulting from improper or inadequate maintenance or handling by the buyer, unauthorized modification or misuse, operation outside of the product's environmental specifications or improper installation or maintenance.

Kontron will not be responsible for any defects or damages to other products not supplied by Kontron that are caused by a faulty Kontron product.

Proprietary Note

This document contains information proprietary to Kontron. It may not be copied or transmitted by any means, disclosed to others, or stored in any retrieval system or media without the prior written consent of Kontron or one of its authorized agents.

The information contained in this document is, to the best of our knowledge, entirely correct. However, Kontron cannot accept liability for any inaccuracies or the consequences thereof, or for any liability arising from the use or application of any circuit, product, or example shown in this document.

Kontron reserves the right to change, modify, or improve this document or the product described herein, as seen fit by Kontron without further notice.

Trademarks

This document may include names, company logos and trademarks, which are registered trademarks and, therefore, proprietary to their respective owners.

Environmental Protection Statement

This product has been manufactured to satisfy environmental protection requirements where possible. Many of the components used (structural parts, printed circuit boards, connectors, batteries, etc.) are capable of being recycled.

Final disposition of this product after its service life must be accomplished in accordance with applicable country, state, or local laws or regulations.

1 Introduction

1.1 Board Overview

CompactPCI® Serial, adopted by the PICMG consortium in 2011, describes a new base standard. The CompactPCI Serial standard introduces a completely new connector that enables a higher signal density and supports even higher transmission frequencies of up to 12 Gb/s as well as modern point-to-point connections such as PCI Express®, SATA, Ethernet and USB on the backplane.

The CPS3003-SA is a highly integrated 3U CompactPCI Serial CPU board based on Intel®'s 3rd Generation Core™ i7 technology in combination with the mobile Intel® QM77 Express Chipset. The CPU board comes with a multi-core CPU package scalable from the dual-core ULV 1.7 GHz Intel® Core™ i7-3517UE up to the quad-core 2.1 GHz i7-3612QE processor. The powerful PCH Intel® QM77 provides a variety of interfaces either routed to front, onboard or the CompactPCI Serial connectors. Memory-demanding applications can make use of up to 16 GB, 1600 MHz DDR3 SDRAM with Error Checking and Correction (ECC). As another security feature, the CPS3003-SA provides a Trusted Platform Module (TPM) which offers hardware-based encryption mechanisms to create, seal or store keys and other important system data.

For graphics intensive applications, the CPS3003-SA offers an excellent graphics performance with integrated DirectX®11, OpenGL 3.1 and OpenCL 1.1 support as well as three independent graphics outputs.

The CPS3003-SA comes with a comprehensive I/O feature set supporting the latest high-speed interfaces such as USB 3.0, SATA 6Gb/s or PCI Express® 3.0. Communication interfaces available on the front panel are two DisplayPort, two USB 2.0 and two Gigabit Ethernet ports. Serial interfaces available on the CompactPCI Serial connectors P1 to P5 are eight USB ports, four SATA interfaces and 17x PCI Express® links. Additional interfaces available on the P6 CompactPCI Serial rear I/O connector are two Gigabit Ethernet interfaces, two USB ports, one DisplayPort and two serial ports.

By adding one of the four extension modules – Smart Extension Module, SATA Flash Module, CPS3003-EXTIO or CPS3003-BRIDGE - the CPS3003-SA's I/O and storage capabilities will be further extended.

The board is offered with various Board Support Packages including Windows, VxWorks and Linux operating systems. For further information concerning the operating systems available for the CP3003-SA, please contact Kontron.

1.2 System Expansion Capabilities

1.2.1 CPS3003-EXTIO Extension Module (8 HP)

The CPS3003-EXTIO module for the 8 HP CPS3003-SA version provides one USB 3.0 port, one COM port, and one CFast socket on the front panel. For further information on the CPS3003-EXTIO extension module, refer to Chapter 6.

1.2.2 CPS3003-BRIDGE Extension Module (9 HP)

The CPS3003-BRIDGE module for the 9 HP CPS3003-SA version provides one USB 3.0 port, one COM port, and one CFast socket on the front panel. In addition, the CPS3003-BRIDGE module is equipped with a PCI Express-to-PCI bridge which converts PCI Express signals into PCI signals and makes them available on the CompactPCI interface. For further information on the CPS3003-BRIDGE extension module, refer to Chapter 7.

1.2.3 CPS-RIO3-01 Rear Transition Module

The CPS-RIO3-01 rear transition module provides comprehensive rear I/O functionality, such as one DisplayPort, two COM ports, two Gigabit Ethernet ports, one USB 3.0 port, and one USB 2.0 port. For further information on the CPS-RIO3-01 rear transition module, refer to Chapter 8.

1.2.4 Smart Extension Module

The Smart Extension Module can be used with the 4 HP CPS3003-SA and expands the onboard I/O capability providing one additional SATA cable connector as well as one USB 2.0 connector thereby facilitating the connection to system-internal USB and SATA devices. For further information on the Smart Extension Module, refer to Chapter 9.

1.2.5 SATA Flash Module


The SATA Flash module can be used with the 4 HP CPS3003-SA and provides up to 32 GB of SLC NAND flash memory. For further information on the SATA Flash module, refer to Chapter 10.

1.3 Board Diagrams

The following diagrams provide additional information concerning board functionality and component layout.


1.3.1 Functional Block Diagram

Figure 1: CPS3003-SA Functional Block Diagram

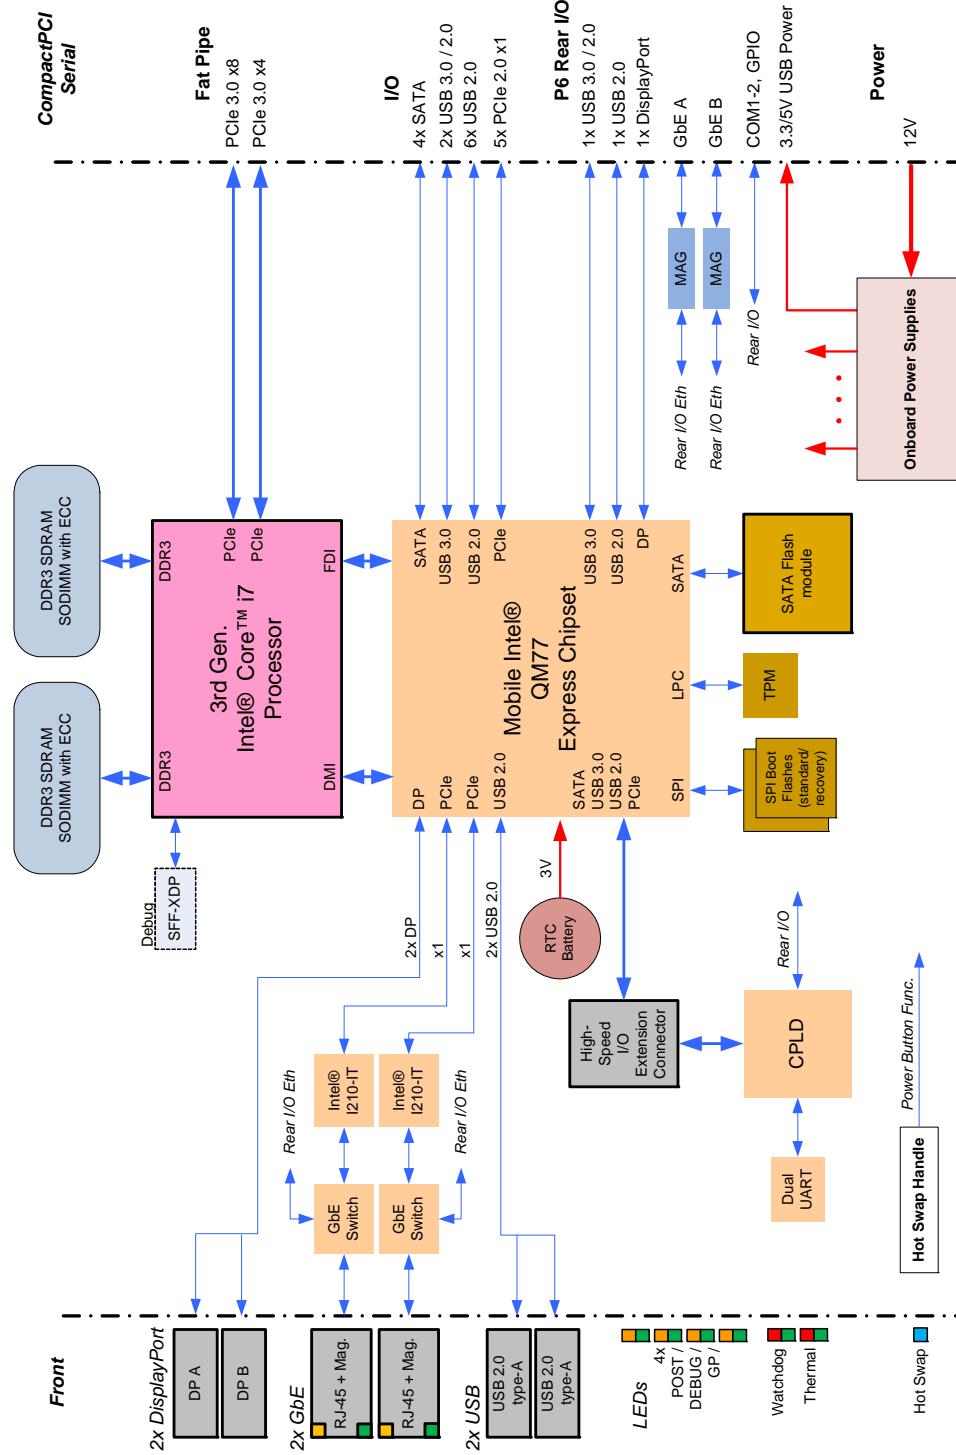

1.3.2 Front Panel

Figure 2: 4 HP CPS3003-SA Front Panel

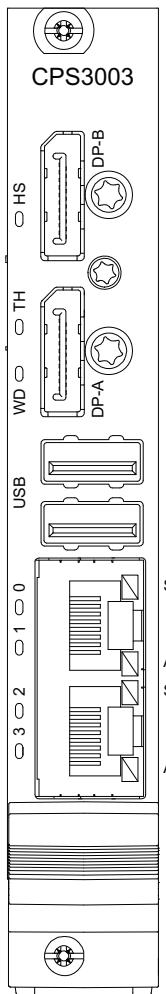

System Status LEDs

| | |
|-----------------|--------------------|
| HS (blue): | Hot Swap Status |
| TH (red/green): | Temperature Status |
| WD (green): | Watchdog Status |

General Purpose LEDs

LED3..0 (red/green/red+green): General Purpose/POST Code

Note: If the General Purpose LEDs 3..0 are lit red during boot-up, a failure is indicated before the uEFI BIOS has started.

Integral Ethernet LEDs

| | |
|-----------------------|---------------------------|
| ACT (green): | Ethernet Link/Activity |
| SPEED (orange): | 1000BASE-T Ethernet Speed |
| SPEED (green): | 100BASE-TX Ethernet Speed |
| SPEED (off) + ACT on: | 10BASE-T Ethernet Speed |

Note: For information regarding the front panel of the 8 HP CPS3003-SA with a CPS3003-EXTIO extension module, refer to Chapter 6.

For information regarding the front panel of the 9 HP CPS3003-SA with a CPS3003-BRIDGE extension module, refer to Chapter 7.

1.3.3 Board Layout

Figure 3: 4 HP CPS3003-SA Board Layout (Top View)


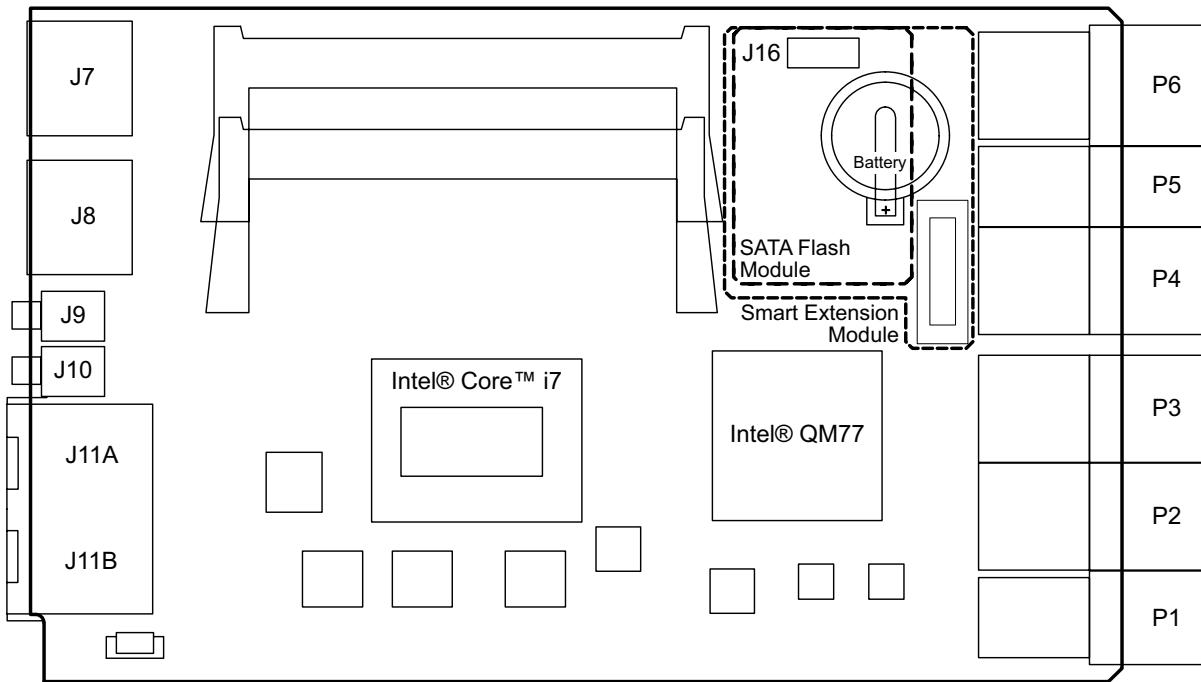


Figure 4: 4 HP CPS3003-SA Board Layout (Bottom View)

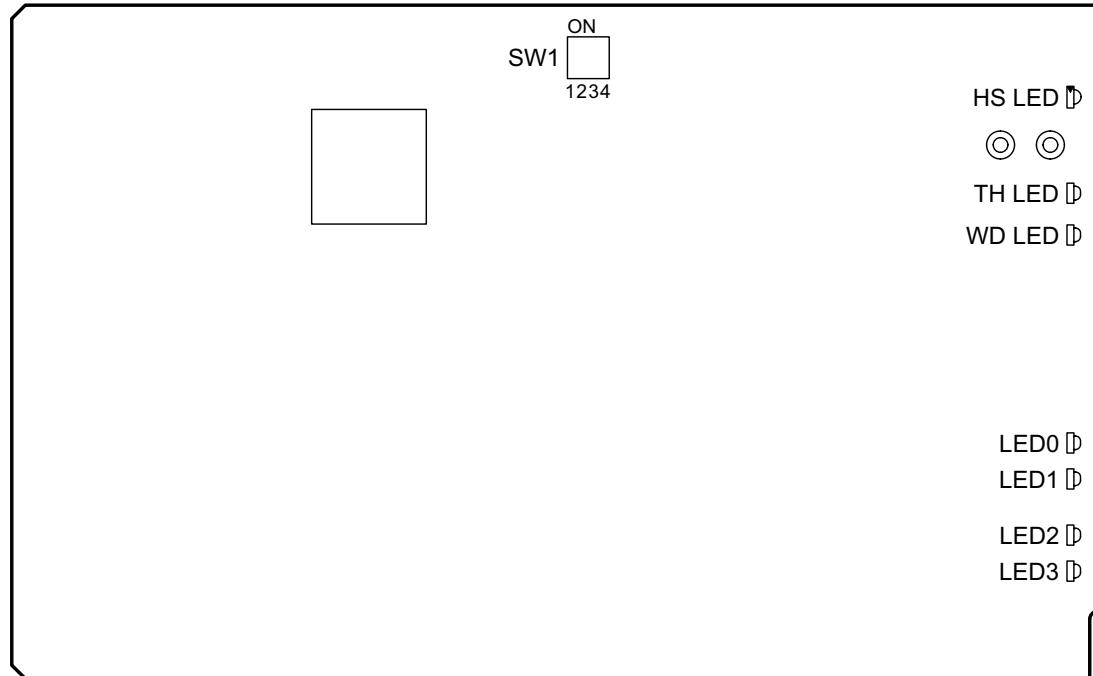

1.4 Technical Specification

Table 1: CPS3003-SA Main Specifications

| FEATURES | | SPECIFICATIONS |
|---------------------|----------------------------|--|
| Processor & Chipset | CPU | <p>The CPS3003-SA supports the following 3rd generation processors:</p> <ul style="list-style-type: none"> » Quad-core Intel® Core™ i7-3612QE (SV), 2.1 GHz, 6 MB L3 cache » Dual-core Intel® Core™ i7-3555LE (LV), 2.5 GHz, 4 MB L3 cache » Dual-core Intel® Core™ i7-3517UE (ULV), 1.7 GHz, 4 MB L3 cache |
| | Graphics Controller | High-performance 3D graphics controller integrated in the processor |
| | PCH | Mobile Intel® QM77 Express Chipset |
| Memory | Main Memory | Up to 16 GB, dual-channel DDR3 SDRAM memory with ECC running at 1600 MHz on two SODIMM sockets |
| | Flash Memory | <p>Two 8 MB SPI boot flash chips for two separate uEFI BIOS images Up to 32 GB SLC NAND flash via an onboard SATA Flash module (SSD)</p> |
| | EEPROM | EEPROM with 64 kbit |
| Interfaces | CompactPCI Serial | <p>CompactPCI Serial interface:</p> <ul style="list-style-type: none"> » Compliant with PICMG® CPCI-S.0 R 1.0 CompactPCI® Serial Specification » Support for the following interfaces: <ul style="list-style-type: none"> » 7x PCI Express® (1 x8 PCI Express 3.0 on fat pipe, 1 x4 PCI Express 3.0 on fat pipe and 5 x1 PCI Express 2.0) » 4 x SATA (2 x SATA 6 Gb/s, 2 x SATA 3 Gb/s) » 2 x USB 3.0 » 8 x USB 2.0 » 2 x Gigabit Ethernet » 12 V power supply » Hot swap capability » Capability of operation both in system slot and in peripheral slot When installed in a peripheral slot, all interfaces except for the Ethernet interfaces and rear I/O interfaces are isolated from the CompactPCI Serial interface. |
| | CompactPCI Serial Rear I/O | <p>The following interfaces are routed to the CompactPCI Serial rear I/O connector P6:</p> <ul style="list-style-type: none"> » COMA and COMB, or COMA and GPIO (all ports have 3.3V LVTTL signaling) » 2 x USB 2.0 » USB 3.0 » DisplayPort » 2x Gigabit Ethernet » System control signals » Input for RTC backup |
| | Gigabit Ethernet | <p>Two 10 Base-T/100 Base-TX/1000 Base-T Gigabit Ethernet interfaces based on two Intel® I210-IT Ethernet controllers. Both interfaces are individually switchable to front I/O or rear I/O and provide Wake-on-LAN support.</p> |

Table 1: CPS3003-SA Main Specifications (Continued)

| FEATURES | | SPECIFICATIONS |
|------------|--------------------------|--|
| Interfaces | USB | <p>Up to 17 USB ports:</p> <ul style="list-style-type: none"> » 8 x USB 2.0 on the CompactPCI Serial interface » 2 x USB 3.0 on the CompactPCI Serial interface » 2 x USB 2.0 ports on the front I/O » 2 x USB 2.0 ports on the rear I/O interface » 1 x USB 3.0 port on the rear I/O interface » 1 x USB 2.0 on the CPS3003-EXTIO/CPS3003-BRIDGE extension module » 1 x USB 3.0 on the CPS3003-EXTIO/CPS3003-BRIDGE extension module |
| | Serial | <p>Two 16C550-compatible UARTs:</p> <ul style="list-style-type: none"> » COMA available on the CPS3003-EXTIO/CPS3003-BRIDGE extension module or on the rear I/O » COMB or GPIO available on the rear I/O only |
| | SATA | <p>Six SATA ports:</p> <ul style="list-style-type: none"> » 2 x SATA 3 Gb/s onboard » 2 x SATA 6 Gb/s on the CompactPCI Serial interface » 2 x SATA 3 Gb/s on the CompactPCI Serial interface <p>High-performance RAID 0/1/5/10 functionality on all SATA ports</p> |
| | I/O Extension Interfaces | <p>I/O extension to 8 HP board version via the CPS3003-EXTIO module:</p> <ul style="list-style-type: none"> » CFast (SATA 3 Gb/s) » USB 3.0 » COMA (RS-232) » Reset button » SATA activity LED <p>I/O extension to 9 HP board version via the CPS3003-BRIDGE module:</p> <ul style="list-style-type: none"> » CFast (SATA 3 Gb/s) » USB 3.0 » COMA (RS-232) » Reset button » SATA activity LED » CompactPCI interface <p>I/O extension of CPS3003-SA via the Smart Extension Module:</p> <ul style="list-style-type: none"> » SATA 3 Gb/s » USB 2.0 |
| Sockets | Front Panel Connectors | <p>DP: two DisplayPort connectors, J7 and J8</p> <p>USB: two 4-pin, type A connectors, J9 and J10</p> <p>Ethernet: dual RJ-45 connector, J11A/B</p> |
| | Onboard Connectors | <p>CompactPCI Serial connectors P1 to P6</p> <p>18-pin extension connector for the SATA Flash module (SSD), J16</p> <p>Two 204-pin DDR3 SODIMM sockets</p> <p>60-pin, high-speed I/O extension connector</p> |

Table 1: CPS3003-SA Main Specifications (Continued)

| FEATURES | | SPECIFICATIONS |
|-----------------|--------------------|--|
| LEDs / Switches | Front Panel LEDs | <p>System Status LEDs:</p> <ul style="list-style-type: none"> » HS (blue): Hot Swap Status » TH (red/green): Temperature Status » WD (green): Watchdog Status <p>General Purpose LEDs:</p> <ul style="list-style-type: none"> » LED3..0 (red/green/red+green): General Purpose / POST Code <p>Ethernet LEDs:</p> <ul style="list-style-type: none"> » ACT (green): Network / Link Activity » SPEED (green/orange): Network Speed |
| | DIP Switch | One DIP switch, SW1, for board configuration |
| Timer | Real Time Clock | Real-time clock with 256 Byte CMOS RAM; battery-backup available |
| | Watchdog Timer | Software-configurable, two-stage Watchdog with programmable timeout ranging from 125 ms to 4096 s in 16 steps Serves for generating IRQ or hardware reset |
| Sys. Management | Thermal Management | CPU and board overtemperature protection is provided by: <ul style="list-style-type: none"> » Up to four Digital Thermal Sensors (DTS), one for each core » One Digital Thermal Sensor (DTS) for the processor graphics controller » One temperature sensor integrated in the Intel® QM77 Chipset for monitoring the chipset » Specially designed heat sinks |
| Security | TPM | Trusted Platform Module (TPM) 1.2 for enhanced hardware- and software-based data and system security |
| Software | uEFI BIOS | AMI Aptio® BIOS firmware based on the uEFI Specification and the Intel Platform Innovation Framework for EFI: <ul style="list-style-type: none"> » LAN boot capability for diskless systems (standard PXE) » Redundant image; fail-safe recovery in case of a damaged image » Non-volatile storage of setting in the SPI boot flash (battery only required for the RTC) » Compatibility Support Module (CSM) providing legacy BIOS compatibility based on AMIBIOS8 » Command shell for diagnostics and configuration » EFI Shell commands executable from mass storage device in a Pre-OS environment (open interface) |
| | Operating Systems | There are various operating systems available for the CPS3003-SA. For further information, please contact Kontron. |

Table 1: CPS3003-SA Main Specifications (Continued)

| FEATURES | | SPECIFICATIONS | |
|--------------|-------------------|--|--|
| General | Power Consumption | See Chapter 4 for details. | |
| | Temperature Range | Operational: 0°C to +60°C -40°C to +85°C | Standard (depending on processor version and air-flow in the system) Extended (with Intel® Core™ i7-3517UE, 1.7 GHz ULV processor only) |
| | | Storage: -40°C to +85°C | Without hard disk and without battery |
| | Battery | 3.0V lithium battery for RTC; Battery type: UL-approved CR1632 Temperature ranges: Operational (load): -20°C to +70°C | typical (refer to the battery manufacturer's specifications for exact range) |
| | | Storage (no load): -40°C to +70°C | typical |
| | Climatic Humidity | 93% RH at 40 °C, non-condensing (acc. to IEC 60068-2-78) | |
| | Dimensions | 100 mm x 160 mm 3U, 4 HP, CompactPCI Serial-compliant form factor | |
| Board Weight | | 4 HP CPS3003-SA with: » Intel® Core™ i7-3612QE (SV), 2.1 GHz, copper heat sink: 530 grams » Intel® Core™ i7-3555LE (LV), 2.5 GHz, aluminum heat sink: 330 grams » Intel® Core™ i7-3517UE (ULV), 1.7 GHz, aluminum heat sink: 330 grams The above-mentioned board weight refers to the 4 HP CPS3003-SA without extension modules such as SATA Flash module or Smart Extension Module. | |

Note: For a description of the additional interfaces available on the 8 HP and 9 HP board versions, refer to Chapter 6, CPS3003-EXTIO Extension Module, and Chapter 7, CPS3003-BRIDGE Extension Module, respectively.

1.5 Standards

This product complies with the requirements of the following standards.

Table 2: Standards

| TYPE | ASPECT | STANDARD |
|---------------|-----------------------|---|
| CE | Emission | EN55022, EN50121-3-2, EN61000-6-3 |
| | Immission | EN55024, EN50121-3-2, EN61000-6-2 |
| | Electrical Safety | EN60950-1 |
| Mechanical | Mechanical Dimensions | IEEE 1101.10 |
| Environmental | Climatic Humidity | IEC60068-2-78 |
| | WEEE | Directive 2002/96/EC Waste electrical and electronic equipment |
| | RoHS 2 | Directive 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment |

In addition, boards ordered with the ruggedized service comply with the following standards as well.

Table 3: Additional Standards for Boards Ordered with Ruggedized Service

| TYPE | ASPECT | STANDARD | REMARKS |
|---------------|---------------------------|-----------------------------|---|
| Environmental | Vibration (Sinusoidal) | IEC60068-2-6 IEC61131-2 | Ruggedized version test parameters: 9-150 (Hz) frequency range 1 (g) acceleration 1 (oct/min) sweep rate 10 cycles/axis 3 axis |
| | Single Shock | IEC60068-2-27 IEC61131-2 | Ruggedized version test parameters: 15 (g) acceleration 11 (ms) shock duration half sine 3 number of shocks per direction (total: 18) 6 directions 5 (s) recovery time |

Note: Customers desiring to perform further environmental testing of the CPS3003-SA must contact Kontron for assistance prior to performing any such testing.

Boards **without conformal coating** must not be exposed to a change of temperature which can lead to condensation. Condensation may cause irreversible damage, especially when the board is powered up again.

Kontron does not accept any responsibility for damage to products resulting from destructive environmental testing.

1.6 Related Publications

The following publications contain information relating to this product.

Table 4: Related Publications

| PRODUCT | PUBLICATION |
|---------------------------|---|
| CompactPCI Serial Systems | PICMG® CPCI-S.0 R 1.0 CompactPCI® Serial Specification |
| CompactPCI Systems | PICMG 2.0, Rev. 3.0 CompactPCI Specification |
| CFast | CFast Specification Revision 1.1 |
| Platform Firmware | Unified Extensible Firmware Interface (uEFI) specification, version 2.3.1 |
| All Kontron products | Product Safety and Implementation Guide, ID 1021-9142 |